


## Operation & Maintenance Instructions


Operation: Load shelves with items evenly distributed on the shelf.

Maintenance:

1. To remove dirt or grime; use a mild soap or cleanser (no abrasives). If there is any question as to suitability, test a small area on an inconspicuous part of the shelving to insure there will be no damage to the finish. Rinse to remove any residue if necessary. Do not "hose down" shelving. Dry shelving thoroughly. Do not leave liquid (or drops) on any surface.
2. Tighten all loose hardware.
3. Replace any badly worn or broken parts.

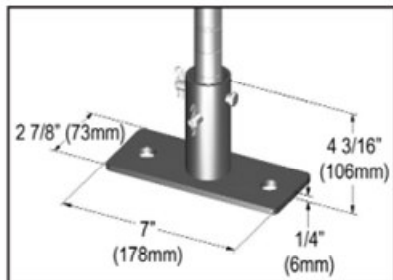

SASES25BP-1

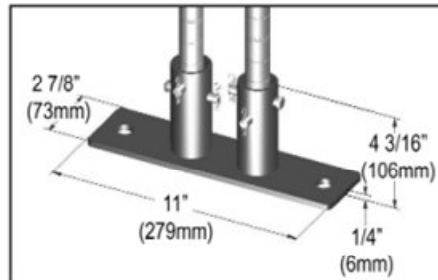

SASES25BP-2

4 shelves shown in picture  
Provided unit will have 5 shelves as specified



8 ea. EQ #2064, Wire Shelving  
Super Erecta #1872NC, 18"W x 72"D x 74"H  
+ Metro #SASES25BP, Footplates

For LSI  
By Chris Bruce  
7/31/2009

#5158-11M

**InnerSpace**  
**ENGINEERING CORPORATION**  
Ph: 650/341-7700 Fax: 650/341-0244  
<http://www.InnerSpaceEng.com>

San Quentin State Penitentiary :Project  
Central Health Services Bldg. :Site  
Miscellaneous Equipment Items :Scope  
#2064 by InterMetro